

Low Phase Noise OCXO
Metal Package, 26 mm x 26 mm

I426 Series


Product Features:

Very Low Phase Noise Option
Low Power Consumption
Voltage Control
High Stability

Applications:

Telecommunications
Data Communications
Instrumentation
Test and Measurement

Frequency	10.000 MHz					
Output Level Sinewave (Into 50Ω, ±5%)	+5 dBm Min., +7 dBm typ., +9 dBm Max.					
Supply Voltage	+12.0 Vdc, ±5%					
Output Load	50 ohms ±5%					
Harmonics (Into 50Ω, ±5%)	-25 dBc typ.					
Frequency Stability	±30.0 ppb (-40°C to +85°C)					
Frequency Vs Aging	±0.5 ppb (per day after 30 days of continuous operation) ±0.1 ppm (1 st year) ±0.5 ppm (10 year)					
Initial Accuracy @ 25°C	±0.1 ppm with Vc = +2.00 VDC					
Current @ 25 ° C (Start Up)	4.0 Watts Typ.					
Current @ 25 ° C (Steady State)	1.5 Watts Typ.					
Voltage Control (Vc) EFC Swing Pullability Input Impedance Linearity (Slope =Positive)	0.0 VDC Min., +2.0 VDC typ., +4.0 VDC Max. ±0.5ppm Min. 100K Ω Min. 10% Typ.					
Phase Noise (dBc/Hz)	Option	A	B	C	D	E
	1Hz	- 80	- 90	- 95	-100	-100
	10Hz	-115	-120	-125	-130	-130
	100Hz	-145	-148	-152	-152	-152
	1kHz	-150	-155	-160	-160	-160
	10kHz	-155	-160	-165	-165	-170
	100kHz	-155	-160	-165	-165	-170
Operating	-40° C to +85° C					
Storage	-55° C to +125° C					

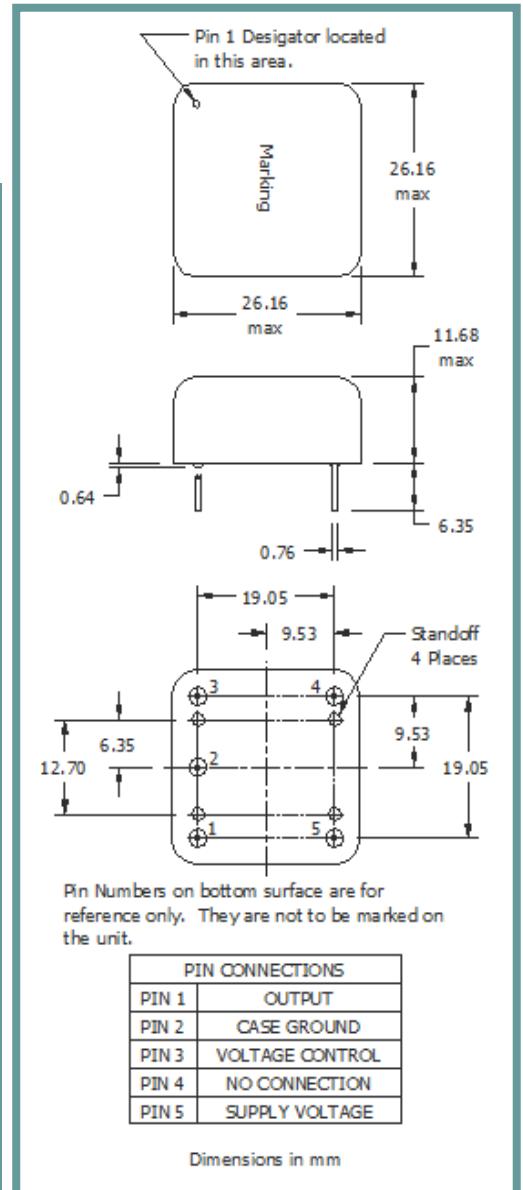

Part Number Guide

Sample Part Number: I426D-92AXV-10.000 MHz


Package	Phase Noise Option (see table above)	Input Voltage	Operating Temperature	Output	Frequency Stability (in ppb)	Voltage Control	Frequency
I426	(Phase Noise Option) -	9 = +12.0V	2= -40° C to +85° C	A = Sine	X = ±30	V = Controlled	-10.000 MHz

Low Phase Noise OCXO
Metal Package, 26 mm x 26 mm


I426 Series

Pb Free Solder Reflow Profile:

Typical Application:

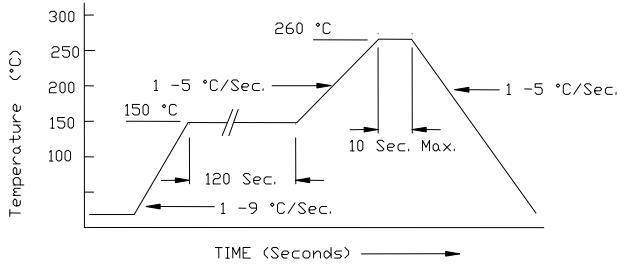

*Units are backward compatible with 240C reflow processes

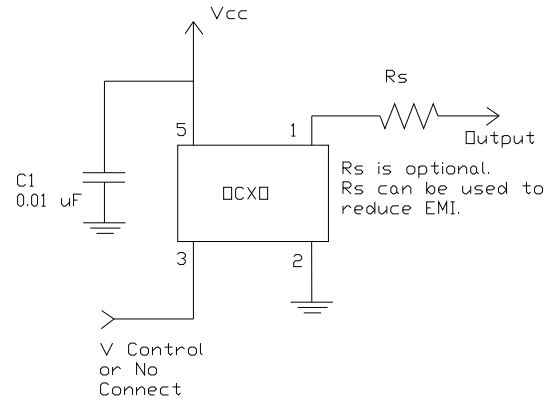

Package Information:

MSL = N.A. (package does not contain plastic; storage life is unlimited under normal room conditions).
Termination = e1 (Sn / Cu / Ag over Ni over Kovar base metal).

Environmental Specifications

Shock	MIL-STD-202G, Method 213, Condition C
Vibration	MIL-STD-202G, Method 204, Condition A

Marking

Line 1: ILSI and Date Code
Line 2: X-XXXXX (Part Number detail = I426X-XXXXX-Freq.)
Line 2: Frequency

PROPRIETARY AND CONFIDENTIAL

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION, AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE NOR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM ILSI America.